




- BANDA ANCHA
- ALTA POTENCIA.
- TOTALMENTE COMPROBADO EN FABRICA.
- WIDE BAND.
- HIGH POWER.
- FULLY FACTORY TESTED

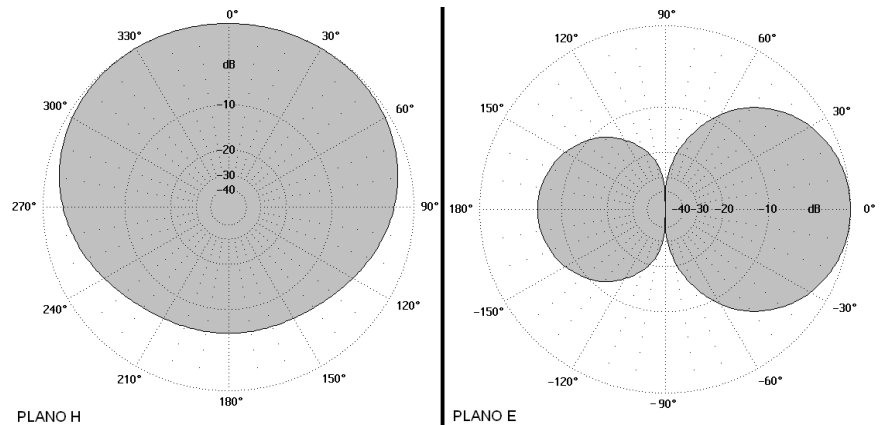

ESPECIFICACIONES ELECTRICAS ELECTRICAL DATA			
RANGO DE FRECUENCIAS /	FREQUENCY RANGE	87.5 ÷ 108 MHz	
GANANCIA [MÁXIMA ÷ MEDIA] /	GAIN [MAX. ÷ AVERAGE]	1.5 ÷ 1.3 dBd	
R.O.E /	V.S.W.R	≤ 1.2 ÷ 1 BROADBAND	
ANCHO DEL HAZ -3dB (potencia) / (MITAD DE BANDA) /	HALF POWER BEAM WIDTH (MIDBAND)	PLANO E /	E PLANE
		PLANO H /	H PLANE
		79°	235°
POLARIZACIÓN /	POLARIZATION	LINEAL / LINEAR	
CONECTOR /	CONNECTOR	1-5/8" EIA	
POTENCIA MÁXIMA /	MAX. POWER RATING	10 Kw	
IMPEDANCIA DE ENTRADA /	INPUT IMPEDANCE	50 Ω	
PROTECCIÓN CONTRA DESCARGA /	LIGHTING PROTECTION	PUESTA A TIERRA / DC GROUNDED	

NOTA: DIAGRAMA DE RADIACIÓN, GANANCIA, F/B Y ANCHO DEL HAZ -3dB CALCULADOS CON INFLUENCIA DE LA TORRE.

NOTE: RADIATION PATTERN, GAIN, F/B AND HALF POWER BEAM WIDTH ANALYZED WITH TOWER INFLUENCE.