



ESPECIFICACIONES MECÁNICAS MECHANICAL DATA		
CONECTORES / CONNECTIONS		7/16 DIN – 7/8" EIA
DIMENSIONES / OVERALL DIMENSIONS		800 x 50 x 50 mm
TEMPERATURA DE TRABAJO / OPERATING TEMPERATURE		-5°C / 50°C
PESO / WEIGHT		3 Kg
Tapas laterales y paredes en aluminio, pletinas en cobre Lateral covers and walls in aluminium, internal platens in copper		


ESPECIFICACIONES ELECTRICAS ELECTRICAL DATA		
RANGO DE FRECUENCIAS / FREQUENCY RANGE		87.5 ÷ 108 MHz
R.O.E / V.S.W.R		≤ 1.05 :1 (32 dB)
IMPEDANCIA DE ENTRADA / INPUT IMPEDANCE		50 Ω
ACOPLAMIENTO / COUPLING FACTOR		3 ± 0.1 dB
AISLAMIENTO / INSULATION		> 35 dB
POTENCIA MÁXIMA / MAX. POWER RATING		4 KW

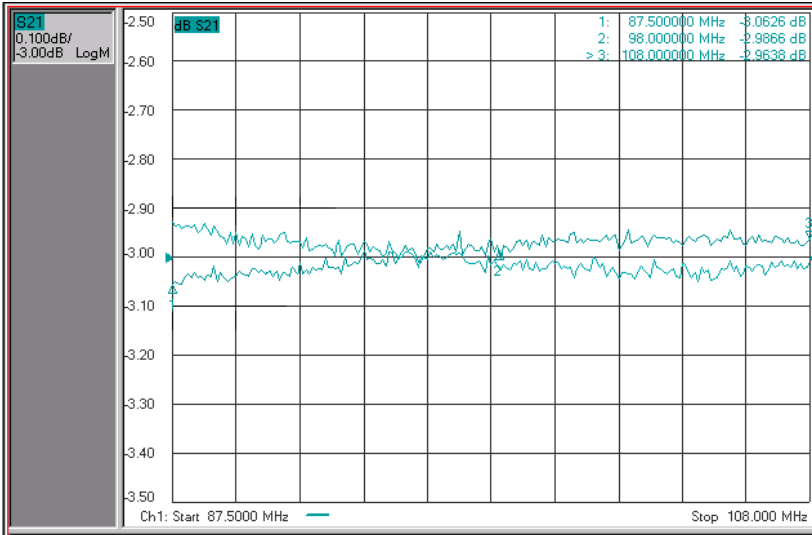

- ACOPLAMIENTO
- COUPLING

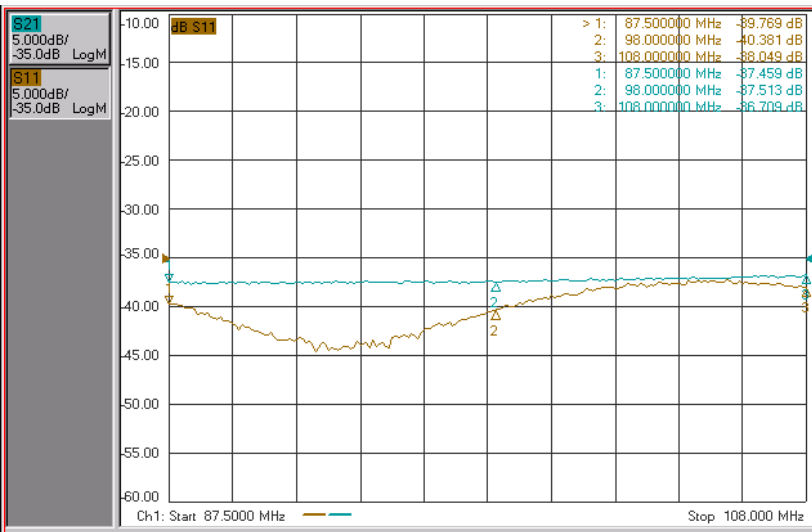

- PÉRDIDAS POR RETORNO Y AISLAMIENTO
- RETURN LOSS AND INSULATION

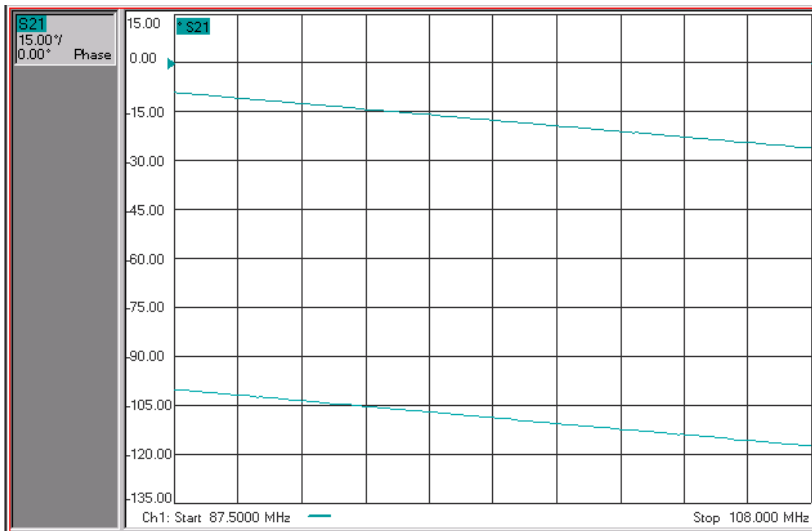

- FASES EN PUERTAS ACOPLADAS
- PHASES IN COUPLED GATES