

## Bi Antenna Specially for Closed Environments Like Tunnels – Easy Installation – Lightweight Design


### ELECTRICAL DATA

Frequency range	87.5 – 108.0 MHz
Gain	2.15 dBi
3 dB Beam Width	Horizontal: 360° - Vertical: 60°
Impedance	50 Ω
VSWR	< 1.4:1 Broad Band
Polarization	Circular
Maximum Power Rating	25 W
Connectors	N female
Lighting Protection	DC Grounded




### MECHANICAL DATA

Dimensions (A x B )	190 x 125 mm
Weight	0.3 Kg
Materials	Dipole in Copper Inner Line Silver Plated Polyester Fiber Glass Radome

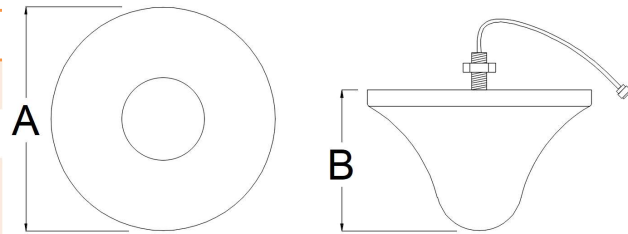

### Mounting

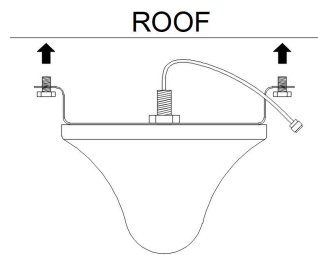

Horizontal Spacing, S	100 m < S < 500 m
Temperature Range	-5°C to 40° C

### CONFIGURATION DATA

